



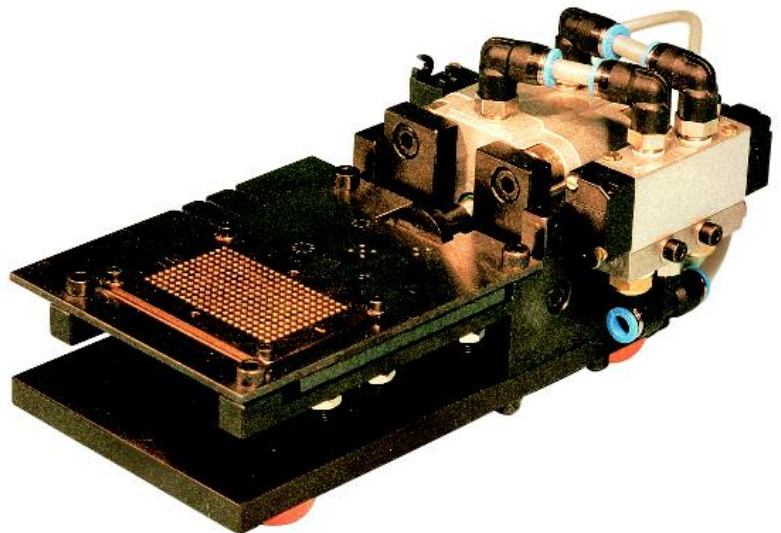

PIE DIFFUSION
 4 Rue des Maraîchers
 78260 ACHERES
 Tel. 01.39.11.61.62
 Fax 01.39.11.72.00

Cutting devices Type C 055 H and C 055 P

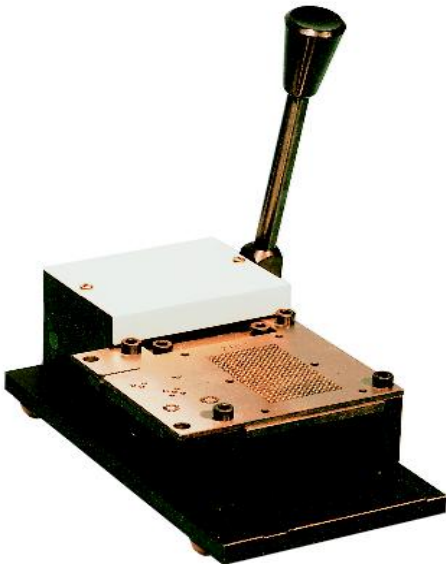

Specification:

- | | |
|-------------------------------------|---|
| - Dimensions: | 280 x 140 x 120 mm |
| - Weight: | approx. 1,5 kgs |
| - Compressed air: | C 055 P: 4 to 6 bar |
| - Pitch dimensions: | 2,5 mm and 2,54 mm |
| - Pitch-grid: | 13 x 21 drill holes |
| - Holes: | TO 18/TO 92/TO 5; 2, 54 x 1,27 mm; 5,08 x 2,54 mm; 7,62 x 5,08 mm;
round pitch for operational amplifiers with 8 and 10 leads;
lateral slits for cutting components with long leads |
| - Wire diameter: | 0,8 to 1,0 mm |
| - Cutting length: | standard 3 mm (different dimensions on inquiry) |
| - Operation: | C 055 P: pneumatic with foot switch or manual triggering |
| - Special-purpose
hole pictures: | on inquiry |

Function:

Cutting device for cutting the leads of components with axial and radial wire termination incl. ICs to required length. Cover and cutting plate are drilled with each other. So the leads are cut simultaneously. The plates are manufactured out of high-quality tool steel and hardened to 60 HRC. After that they are ground.

Forms of the components:

