

PIE DIFFUSION 4 Rue des Maraichers 78260 ACHERES Tel. 01.39.11.61.62 Fax 01.39.11.72.00


Eyelet inserting device Type A 040/R



Specification:

- Dimensions:
- Weight:
- Connection:
- Compressed air:
- Loose eyelets:
- Capacity:

320 x 600 x 600 mm ca. 20 kgs 230 V / 50 Hz / 100 W 3,5 to 4,0 bar 300 to 400 one per second

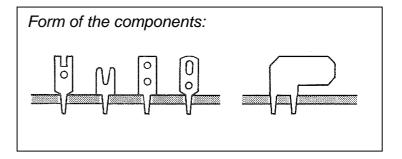

Function:

The loose eyelets are automatically moved into the device by a circle conveyor (vibrator) and with a compressed air cylinder they are punched into the pcb. For that the pcb is manually held to the setting position. The setting process is triggered by a sensoring pin. This inserting device processes all customary in trade eyelets (also double tongues), which can be provided for the device by a circle conveyor.