


# OFFER

07.01.2016



**PIE DIFFUSION**  
4 Rue des Maraichers  
78260 ACHERES  
Tel. 01.39.11.61.62  
Fax 01.39.11.72.00

## Cutting and bending device Type C 034

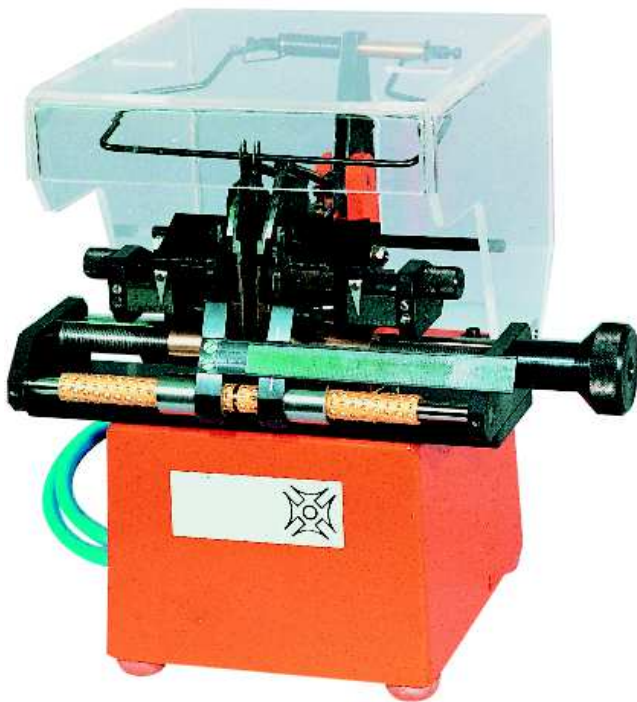

### Specification:

- Dimensions: 200 x 200 x 280 mm
- Weight: ca. 6 kgs
- Compressed air: 4 to 6 bar
- Min. pitch: C 034/S: 12,5 mm;  
C 034: 7,5 mm
- Max. pitch: C 034/S: 100 mm;  
C 034: 100 mm
- Wire diameter: C 034/S: from 0,8 to 1,4 mm  
C 034: from 0,4 to 0,8 mm
- Components: loose or taped (manual supplied)
- Operation: pneumatic with foot switch

### *Form of the components:*



### **Function:**

To make the insertion of axial wired components with short leads possible, the components leads have to be cut to the suitable length and bent to the required pitch.

Both suitable cutting length and required pitches can be adjusted by adjusting screws. After that the components can be processed. The set-up is shown on the scale of the each specific device. The component is manually placed between the tools. The processing of the component is started by a foot switch. The conversion for different cutting and pitch dimensions is done in less than one minute.